

Air Conditioning Solutions for electric & electronic cabinet systems

- **Superior Quality**
- **Maintenance Free (Elite Series)**
- **Global Listings**
- **Excellent Value**
- **In Stock**

Condensate Evaporation


- Reliable, **automatic condensate evaporation** without additional electric heater (*Elite Series*)

Surface finish

- Powder coated (Epoxy - Polyester) RAL 7035 texture finish
- Stainless steel on request

Electronic Controller

- Temperature display
- High temperature alarm

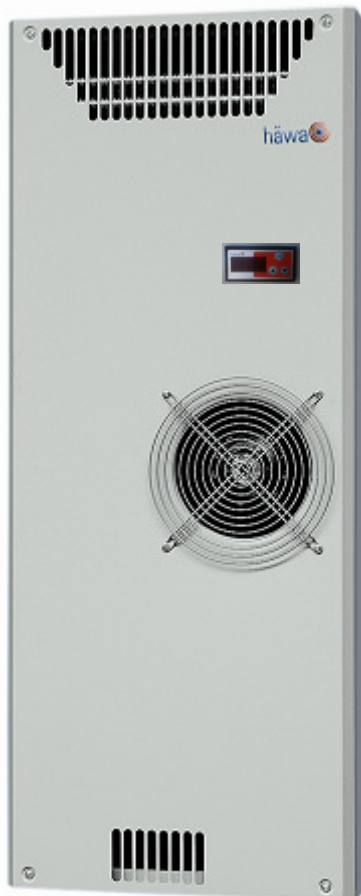

Maintenance free

- **No filter required** due to design of heat exchanger (*Elite Series*)

Compact Design

- Small space
- High performance

Seal

- Special foam seal
- Maintains NEMA 12 rating of enclosure



High Quality

- Only highest quality components used
- Two sealed circuits separate the inside and outside loop

hawa air conditioning systems powder coated (Epoxy-Polyester) RAL 7035, texture finish

DON'T FIND THE SIZE YOU NEED?
PLEASE CONTACT HAEWA FOR ANY MODIFICATION
OR CUSTOMIZATION AT 1-800-783-4239

	Cooling Capacity*	Cooling Capacity*	Voltage	FLA	Starting Current	Size	Weight	Order No.
	at 60 Hz operation	at 50 Hz operation	[V, ph, Hz]	[A]	[A]	H x W x D	lbs / kg	
Premium Series								
<ul style="list-style-type: none"> - For side or door mounting - IP 54 / NEMA 12** - High-efficiency heat exchanger and filter - Control Logic with temperature sensor and digital temperature readout 	1450 BTU/h (425 W)	370 W (1230 BTU/h)	115, 1, 60 230, 1, 50/60	4.0 2.1	6.6 3.2	20.5" x 10.7" x 5.7" 520 x 270 x 144 mm	31 / 14	3129-0400-11-27 3129-0400-23-27
	4000 BTU/h (1170 W)	980 W (3350 BTU/h)	115, 1, 50/60 230, 1, 50/60	5.8 2.9	22 11	37.4" x 15.8" x 8.1" 950 x 400 x 205 mm	97 / 44 86 / 39	3129-1000-11-27 3129-1000-23-27
	6000 BTU/h (1760 W)	1550 W (5295 BTU/h)	115, 1, 50/60 230, 1, 50/60	10 4.9	42 22	44.1" x 15.8" x 10.3" 1120 x 400 x 260 mm	120 / 54 97 / 44	3129-1500-11-27 3129-1500-23-27
	8000 BTU/h (2350 W)	2100 W (7170 BTU/h)	230, 1, 50/60 460, 3, 50/60	6.8 2.0	25 16	59.1" x 18.2" x 10.3" 1500 x 460 x 260 mm	130 / 59 135 / 61	3129-2100-23-27 3129-2100-46-27
	10000 BTU/h (2930 W)	2600 W (8880 BTU/h)	230, 1, 50/60 460, 3, 50/60	9.0 3.2	35 22	59.1" x 18.2" x 10.3" 1500 x 460 x 260 mm	130 / 59 135 / 61	3129-2600-23-27 3129-2600-46-27

	Cooling Capacity*	Cooling Capacity*	Voltage	FLA	Starting Current	Size	Weight	Order No.
	at 60 Hz operation	at 50 Hz operation	[V, ph, Hz]	[A]	[A]	H x W x D	lbs / kg	
Elite Series								
Maintenance-free design for dirty environment								
<ul style="list-style-type: none"> - No filter required - Automatic condensate evaporation - For side or door mounting - IP 54 / NEMA 12** - High-efficiency heat exchanger - Control Logic with temperature sensor and digital temperature readout 	1600 BTU/h (470 W)	400 W (1370 BTU/h)	115, 1, 60 230, 1, 50/60	4.0 2.1	6.6 3.2	20.7" x 10.9" x 5.7" 525 x 275 x 144 mm	31 / 14	3120-0400-11-27 3120-0400-23-27
	3000 BTU/h (880 W)	780 W (2665 BTU/h)	115, 1, 50/60 230, 1, 50/60	7.0 3.5	24 12	38.6" x 15.6" x 7.5" 980 x 395 x 190 mm	86 / 39 75 / 34	3120-0800-11-27 3120-0800-23-27
	5000 BTU/h (1465 W)	1200 W (4100 BTU/h)	115, 1, 50/60 230, 1, 50/60	8.7 4.4	36 18	57.1" x 16.6" x 5.6" 1450 x 400 x 140 mm	119 / 54 104 / 47	3120-1200-11-27 3120-1200-23-27
	6500 BTU/h (1900 W)	1600 W (5465 BTU/h)	115, 1, 50/60 230, 1, 50/60	12 6.5	44 30	57.1" x 16.6" x 6.4" 1450 x 400 x 162 mm	130 / 59 115 / 52	3120-1600-11-27 3120-1600-23-27
	8600 BTU/h (2520 W)	2200 W (7515 BTU/h)	230, 1, 50/60 460, 3, 50/60	9.0 3.2	35 22	59.1" x 18.2" x 9.1" 1500 x 460 x 230 mm	139 / 63 146 / 66	3120-2200-23-27 3120-2200-46-27

	Cooling Capacity*	Cooling Capacity*	Voltage	FLA	Starting Current	Size	Weight	Order No.
	at 60 Hz operation	at 50 Hz operation	[V, ph, Hz]	[A]	[A]	H x W x D	lbs / kg	
Rooftop Series								
For roof mounting - IP 54 / NEMA 12**	5600 BTU/h (1640 W)	1440 W (4920 BTU/h)	230, 1, 50/60	6.5	30	16.6" x 23.7" x 14.8" 420 x 600 x 375 mm	31 / 14	3128-1500-22-17

* Cooling capacity is based on 95 °F / 95 °F

** Protection classification (against the enclosure; under correct operating conditions)

All hawa air conditioning systems utilize the environmentally friendly, non-ozone depleting refrigerant R134a.

All 3120- and 3129-series hawa air conditioning systems are equipped with an electronic controller with temperature display and high temperature alarm (except for "0400" Models, which are thermostat-controlled).

Custom sizes and configurations available upon request!