


HLT PENDANT ARMS

Flexible positioning for HMIs

- ***Strong & robust***
- ***Flexible configuration***
- ***Excellent value***
- ***In Stock***

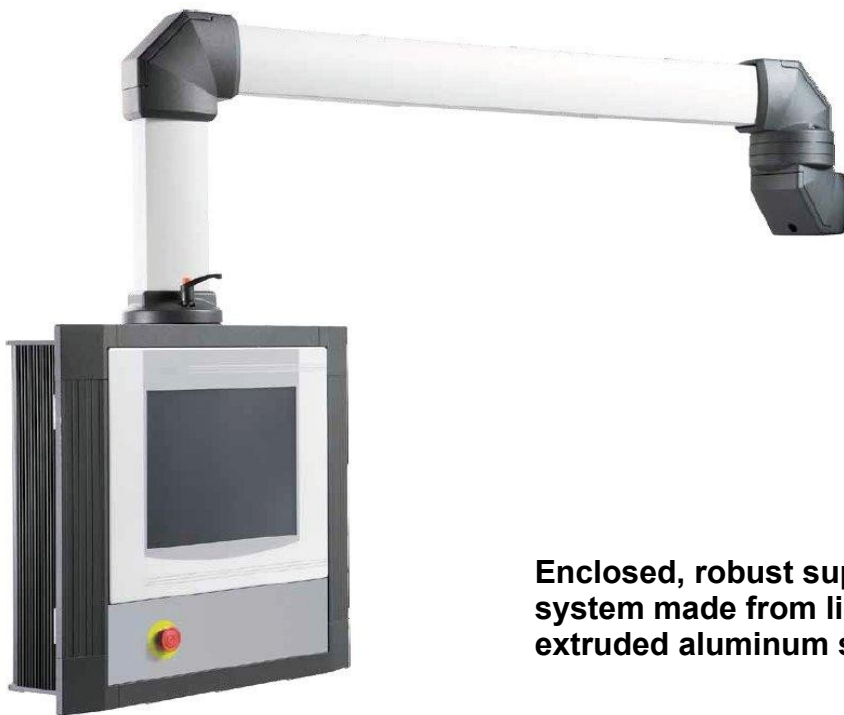

Enclosed, robust support arm system made from light-weight extruded aluminum sheath.

A wide range of components offer a high degree of flexibility in configuration

hawa HLT type pendant arm systems strong but lightweight aluminum profiles and components

DON'T FIND THE CONFIGURATION YOU NEED?
PLEASE CONTACT HAEWA FOR ANY MODIFICATION
OR CUSTOMIZATION AT 1-800-783-4239

	Description	Order No.	Used for ...	Catalog Page #
Surface fixtures	1 Base bracket / Wall flange	7595-7401-06-01	straight connections to vertical or horizontal surfaces	10
	2 90° Set-up joint	7595-7401-01-01	horizontal swiveling of the support arm to horizontal surface	8
	3 Wall joint	7595-7401-02-01	horizontal swiveling of the support arm to vertical surface	9
In-between joints & elbows	4 90° Elbow	7595-7401-04-01	stiff 90° turn of profile	12
	90° Elbow, rotating	7595-7401-25-01	rotating 90° turn of profile	
	5 Intermediate joint	7595-7401-03-01	rotating joint between two horizontal profiles	11
Enclosure / monitor joints & adapters	6 90° Elbow adapter 48	7595-7401-16-01	stiff 90° turn to round profile 48	20
	7 Straight joint	7595-7401-05-01	connecting vertical profile to an enclosure	15
	8 Straight joint, narrow flange	7595-7401-07-01	connecting vertical profile to a narrow enclosure	16
	Compact joint, narrow flange	7595-7401-14-01	connecting vertical profile to a narrow enclosure (compact version)	
	9 90° Elbow joint	7595-7401-08-01	connecting horizontal profile to an enclosure	13
	10 90° Elbow joint, narrow flange	7595-7401-09-01	connecting horizontal profile to a narrow enclosure	14
	11 Incline adapter	7595-7401-10-01	10° incline of straight joint or 90° elbow joint	17
	12 Incline adapter, narrow flange	7595-7401-11-01	10° incline of straight joint or 90° elbow joint – each with narrow flange	18
	Swivel tilt coupling	7595-7301-01-01	Swivel & tilt function for monitor attachment	22
	13 VESA adapter	7595-7401-12-01	connection to a monitor or enclosure with the VESA 75 hole pattern	19
Profiles	14 Adapter 48	7595-7401-17-01	connecting vertical round pipe 48 to an enclosure	21
	Elbow adapter 48	7595-7401-16-01	connecting horizontal profile with vertical round pipe 48	20
	17 Light adapter	7595-7401-15-01	to connect a visual warning light	24
	15 HLT aluminum profile	7595-7401-30-0250	horizontal & vertical use – length: 250 mm / 9.8"	23
		7595-7401-30-0500	horizontal & vertical use – length: 500 mm / 19.7"	
		7595-7401-30-1000	horizontal & vertical use – length: 1000 mm / 39.4"	
		7595-7401-30-1500	horizontal & vertical use – length: 1500 mm / 59"	
7595-7401-30-2000		horizontal & vertical use – length: 2000 mm / 78.7"		
16 HLT round pipe 48	7595-7401-40-0250	vertical use – length: 250 mm / 9.8"	24	
	7595-7401-40-0500	vertical use – length: 500 mm / 19.7"		
	7595-7401-40-0750	vertical use – length: 750 mm / 29.5"		

