


# ***HLT PENDANT ARMS***

***Flexible positioning for HMIs***

- ***Strong & robust***
- ***Flexible configuration***
- ***Excellent value***
- ***In Stock***

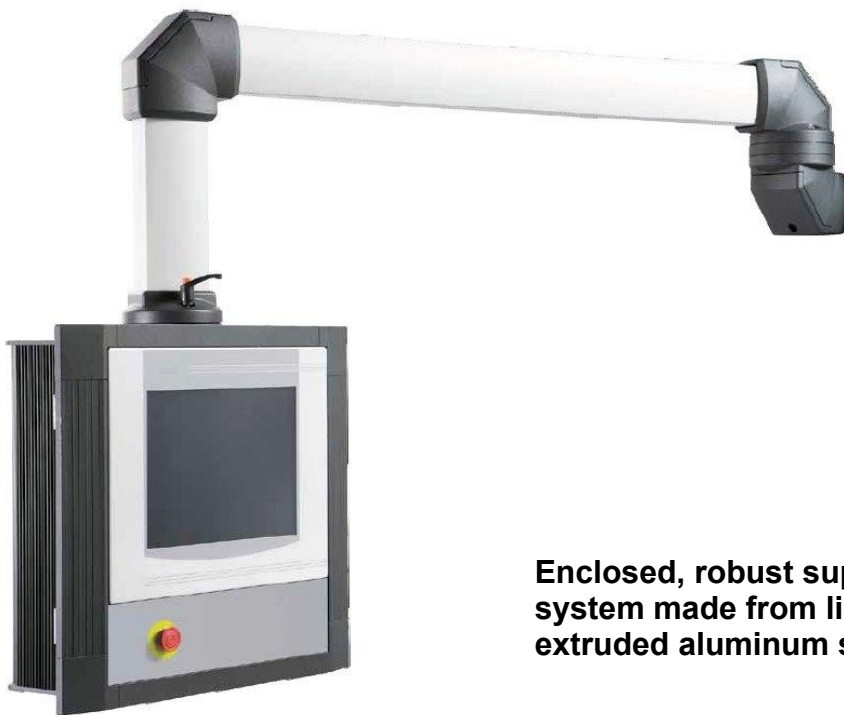

**Enclosed, robust support arm system made from light-weight extruded aluminum sheath.**

**A wide range of components offer a high degree of flexibility in configuration**

## hawa HLT type pendant arm systems strong but lightweight aluminum profiles and components

DON'T FIND THE CONFIGURATION YOU NEED?  
PLEASE CONTACT HAEWA FOR ANY MODIFICATION  
OR CUSTOMIZATION AT 1-800-783-4239

|  | Description                       | Order No.   | Used for ...   | Catalog Page # |
|--|-----------------------------------|---|--|----------------|
| <b>Surface fixtures</b>                          | 1 Base bracket / Wall flange      | 7595-7401-06-01                                     | straight connections to vertical or horizontal surfaces                    | 10             |
|  | 2 90° Set-up joint                | 7595-7401-01-01                                     | horizontal swiveling of the support arm to horizontal surface              | 8              |
|  | 3 Wall joint                      | 7595-7401-02-01                                     | horizontal swiveling of the support arm to vertical surface                | 9              |
| <b>In-between joints &amp; elbows</b>            | 4 90° Elbow                       | 7595-7401-04-01                                     | stiff 90° turn of profile  | 12             |
|  | 90° Elbow, rotating               | 7595-7401-25-01                                     | rotating 90° turn of profile   |                |
|  | 5 Intermediate joint              | 7595-7401-03-01                                     | rotating joint between two horizontal profiles                             | 11             |
| <b>Enclosure / monitor joints &amp; adapters</b> | 6 90° Elbow adapter 48            | 7595-7401-16-01                                     | stiff 90° turn to round profile 48   | 20             |
|  | 7 Straight joint                  | 7595-7401-05-01                                     | connecting vertical profile to an enclosure                                | 15             |
|  | 8 Straight joint, narrow flange   | 7595-7401-07-01                                     | connecting vertical profile to a narrow enclosure                          | 16             |
|  | Compact joint, narrow flange      | 7595-7401-14-01                                     | connecting vertical profile to a narrow enclosure (compact version)        |                |
|  | 9 90° Elbow joint                 | 7595-7401-08-01                                     | connecting horizontal profile to an enclosure                              | 13             |
|  | 10 90° Elbow joint, narrow flange | 7595-7401-09-01                                     | connecting horizontal profile to a narrow enclosure                        | 14             |
|  | 11 Incline adapter                | 7595-7401-10-01                                     | 10° incline of straight joint or 90° elbow joint                           | 17             |
|  | 12 Incline adapter, narrow flange | 7595-7401-11-01                                     | 10° incline of straight joint or 90° elbow joint – each with narrow flange | 18             |
|  | Swivel tilt coupling              | 7595-7301-01-01                                     | Swivel & tilt function for monitor attachment                              | 22             |
|  | 13 VESA adapter                   | 7595-7401-12-01                                     | connection to a monitor or enclosure with the VESA 75 hole pattern         | 19             |
| <b>Profiles</b>                                  | 14 Adapter 48                     | 7595-7401-17-01                                     | connecting vertical round pipe 48 to an enclosure                          | 21             |
|  | Elbow adapter 48                  | 7595-7401-16-01                                     | connecting horizontal profile with vertical round pipe 48                  | 20             |
|  | 17 Light adapter                  | 7595-7401-15-01                                     | to connect a visual warning light  | 24             |
|  | 15 HLT aluminum profile           | 7595-7401-30-0250                                   | horizontal & vertical use – length: 250 mm / 9.8"                          | 23             |
|  |                                   | 7595-7401-30-0500                                   | horizontal & vertical use – length: 500 mm / 19.7"                         |                |
|  |                                   | 7595-7401-30-1000                                   | horizontal & vertical use – length: 1000 mm / 39.4"                        |                |
|  |                                   | 7595-7401-30-1500                                   | horizontal & vertical use – length: 1500 mm / 59"                          |                |
| 7595-7401-30-2000                                |                                   | horizontal & vertical use – length: 2000 mm / 78.7" |  |                |
| 16 HLT round pipe 48                             | 7595-7401-40-0250                 | vertical use – length: 250 mm / 9.8"                | 24   |                |
|  | 7595-7401-40-0500                 | vertical use – length: 500 mm / 19.7"               |  |                |
|  | 7595-7401-40-0750                 | vertical use – length: 750 mm / 29.5"               |  |                |

