

Technische Daten:

Nennspannung:	230 V, 50/60 Hz	115 V, 50/60 Hz
Nennstrom:	6,5 A	12 A
Anlaufstrom:	30 A	44 A
Vorsicherung:	16 AT	16 AT
Nutzkühlleistung DIN3168/EN814:	L35-L35: 1600 Watt L35-L50:1000 Watt	
Kältemittel:	R134a / 810 g / 28.6 oz	
Zul. Druck:	28 bar	
Umgebungstemperaturbereich:	+20°C.....+40°C	
Lagertemperatur:	-20.....+70°C	
Schutzart Innenkreislauf / Außenkreislauf:	IP54 / IP44	
Gewicht:	51 kg	59 kg
Werkseitige Temperatureinstellung:	35 °C	
Maße:	B x H x T: 400 x 1450 x 162 mm / 15.75" x 57.09" x 6,38"	

Technical data:

Nominal voltage:	230 V, 50/60 Hz	115 V, 50/60 Hz
Rated current:	6,5 A	12 A
Starting current:	30 A	44 A
Additional fuse:	16 AT	16 AT
Actual cooling capacity: DIN3168/EN814:	L35-L35: 1600 Watt L35-L50:1000 Watt	
Coolant:	R134a / 810 g / 28.6 oz	
Allowable pressure:	28 bar	
Ambient temperature range:	+20°C.....+40°C	
Stock temperature:	-20.....+70°C	
Protection class Internal circuit/external circuit:	IP54 / IP44	
Weight:	51 kg	59 kg
Factory temperature set:	35 °C	
Dimensions	W x H x D: 400 x 1450 x 162 mm / 15.75" x 57.09" x 6,38"	

Caractéristiques techniques

Tension nominale:	230 V, 50/60 Hz	115 V, 50/60 Hz
Courant nominal:	6,5 A	12 A
Courant de démarrage:	30 A	44 A
Fusible en amont:	16 AT	16 AT
Puissance frigorifique DIN3168/EN814:	L35-L35: 1600 Watt L35-L50:1000 Watt	
Refrigerant:	R134a / 810 g / 28.6 oz	
Pression tolér��e:	28 bar	
Temperature ambinate:	+20°C.....+40°C	
Stock ambinate:	-20.....+70°C	
Degr�� de protection Circuit int��rieur/circuit ext��rieur:	IP54 / IP44	
Poids:	51 kg	59 kg
R��glage temp��rature site:	35 °C	
Dimensions:	L x H x P: 400 x 1450 x 162 mm / 15.75" x 57.09" x 6,38"	




Regelektronik
Electronic controller
R  gulation   lectronique


Kondensatverdunstung
Condensirte evaporator
Condensation   vaporation

Kondensat-Ablaufstutzen
Fitting for condensed water drain
Ecoulement condensation

Lochbild: Schrank-Anbau
Drilling template: External mounting
Gabarit de découpes: Montage extérieur

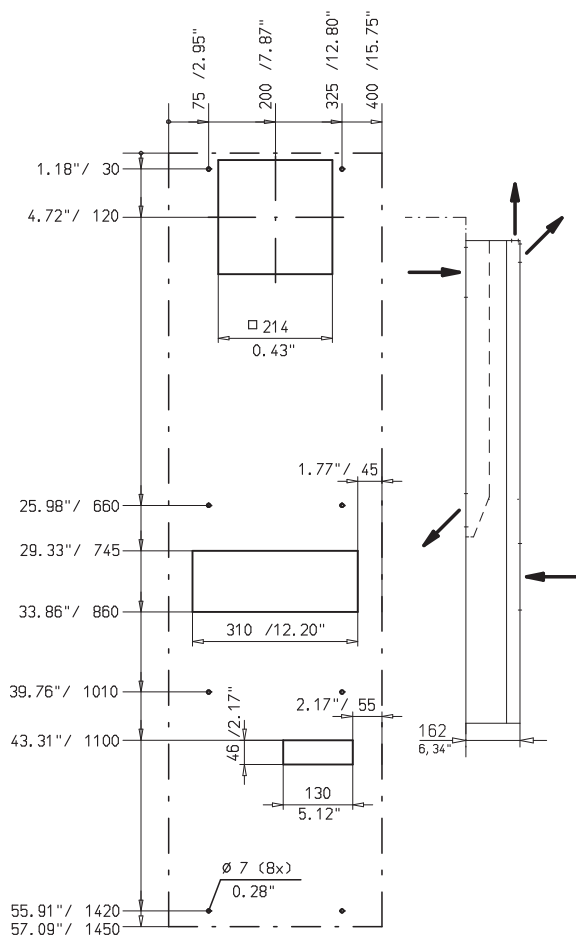

Lochbild: Schrank-Einbau
Drilling template: Internal mounting
Gabarit de découpes: Montage intérieur

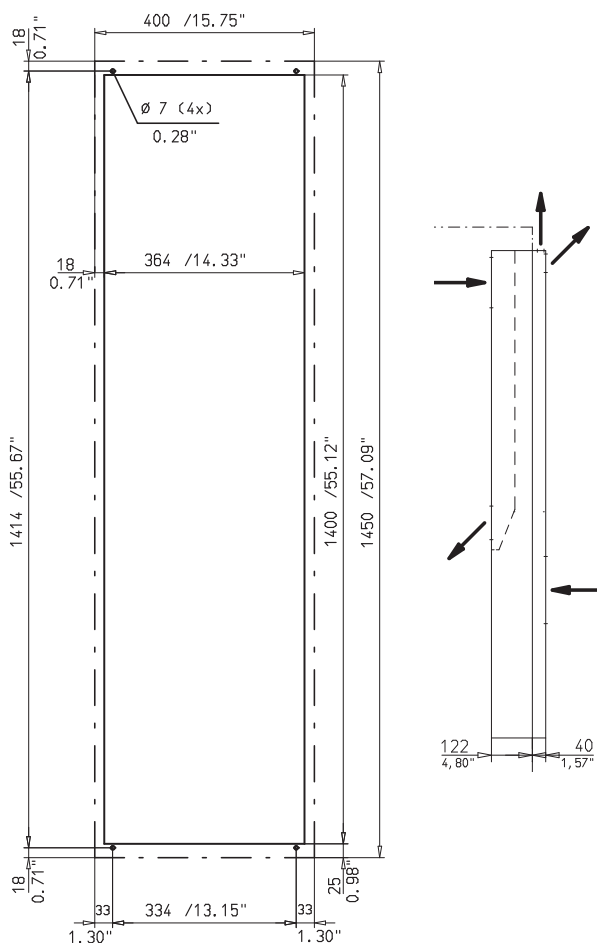

Änderungen vorbehalten / Specifications subject to modifications / Sous réserve de modifications
© håwa, 02/2018 3120-1600-00U77TD

	SCHRANKSYSTEME
	X-FRAME
	GEHÄUSE
	ZUBEHÖR
	THERMOKOMPONENTEN
	LEITUNGSKANÄLE
	SONDERBAUTEN
	WERKZEUGE

håwa GmbH

Industriestraße 12
88489 Wain
Tel. +49 7353 9846-0
Fax +49 7353 1050
info@haewa.de
www.haewa.de

F 67140 Eichhoffen

håwa France Sarl
8 B Rue des Industries
Tel. +33 3 88088880
Fax: +33 3 88088859
info@haewa.fr

USA Duluth, GA 30097

haewa Corporation
3764 Peachtree Crest Drive
Tel. +1 770 9213272
Fax +1 770 9212896
info@haewa.com